


## Iron-Horse XL

Technical Datasheet

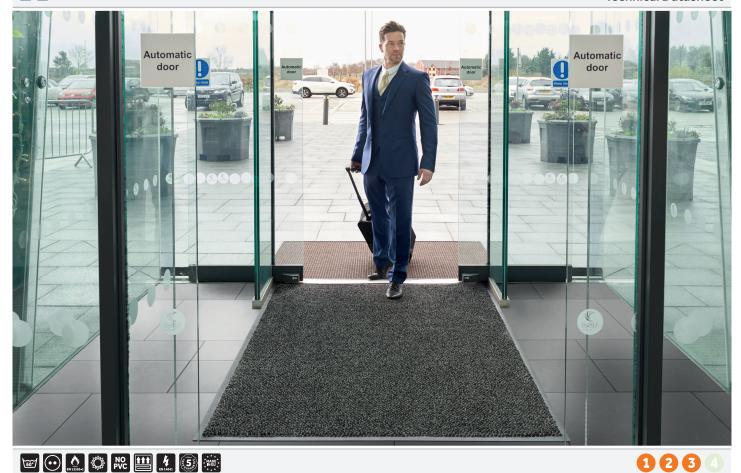

**Product:** Iron-Horse XL

**Customs tariff number:** 57032999

**Product details:** » Extraordinary dirt catching performance

» Enhanced water holding capability

» Skid resistant rubber back

» Light- and colour resistant

» PVC-free

» Suitable for underfloor heating

» 5 year Manufacturers Guarantee\*

» 11 year warranty against significant colour loss

» Made in Europe

**Burning behaviour:** EN 13501-1 / Cfl-s1

Static electrical propensity: EN 14041 Antistatic

**Slip resistance:** NFSI High-Traction

**Total mat weight:** 2.54 kg/sqm

**Overall height:** approx. 13 - 14 mm

**Dirt absorption:** 1000 g/sqm **Moisture absorption:** 4 - 5 l/sqm

Application areas: » Entrances with heavy traffic

Standard widths with borders: 85 cm, 115 cm and 150 cm

**Standard widths** 3 cm smaller than for mats with borders

without borders: (e.g. 82 cm)

**Standard lengths:** all lengths up to 700 cm

Colouration: Solution dyed

Pile: 100 % High-Twist Nylon (HTN) Polyamide 6

**Pile height:** approx. 12 - 13 mm

 Pile weight:
 without substrate:
 740 g/sqm

 with substrate:
 840 g/sqm

**Backing:** 100 % Nitrile rubber

Available with kleeted or smooth backing

Rubber thickness:1.40 mmRubber weight:1.70 kg/sqmBorder width:20 mm

Available with or without borders

Border thickness: 2.40 mm

**Cleaning:**» Washable up to 60 °C
» Tumble dry up to 60 °C

## Colours:







