


Iron-Horse

Technical Datasheet

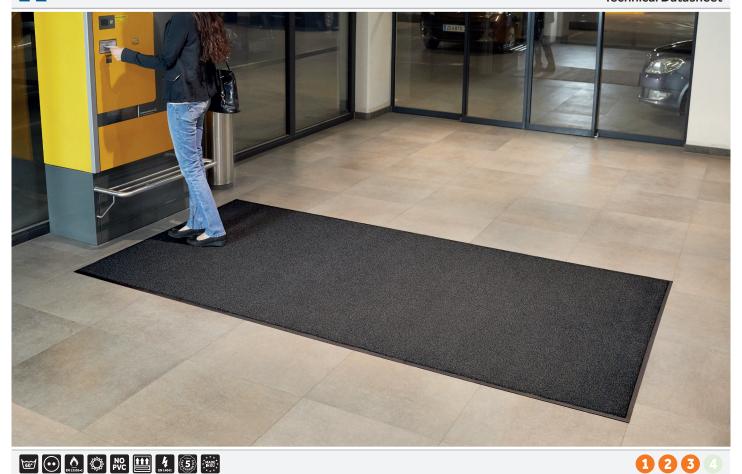

Product: Iron-Horse

Customs tariff number: 57032999

Product details: » Extraordinary dirt catching performance

» Skid resistant rubber back » Light- and colour resistant

» PVC-free

» Suitable for underfloor heating » 5 year Manufacturers Guarantee*

» 11 year warranty against significant colour loss

» Made in Europe

Burning behaviour: EN 13501-1 / Cfl-s1

Static electrical propensity: EN 14041 Antistatic

NFSI High-Traction

Total mat weight: 2.40 kg/sqm

Overall height: approx. 11 - 12 mm

Dirt absorption: 800 g/sqm Moisture absorption: 3 - 4 l/sqm

Application areas: » Entrances

» Hallways » Elevators » Receptions

» Restrooms

Standard widths with borders: 85 cm, 115 cm and 150 cm

Black Pearl, Black Steel, Black Cedar, Granite and Midnight Grey up to 200 cm

3 cm smaller than for mats with borders

Standard lengths: all lengths up to 700 cm

Colouration: Solution dyed

Standard widths

without borders:

Cleaning:

Pile: 100 % High-Twist Nylon (HTN) Polyamide 6 Pile height: approx. 10 - 11 mm

(e.g. 82 cm)

Pile weight: without substrate:

600 g/sqm with substrate: 700 g/sqm

Backing: 100 % Nitrile rubber

Available with kleeted or smooth backing

Rubber thickness: 1.40 mm Rubber weight: 1.70 kg/sqm Border width: 20 mm

Available with or without borders **Border thickness:**

2.40 mm

» Washable up to 60 °C

(Washing is not recommended for mats without reinforced edges when rubber backing is less than 1.8 mm thick)

» Tumble dry up to 60 °C

Colours:



Slip resistance:















